


Fichier:VSM Head.jpg

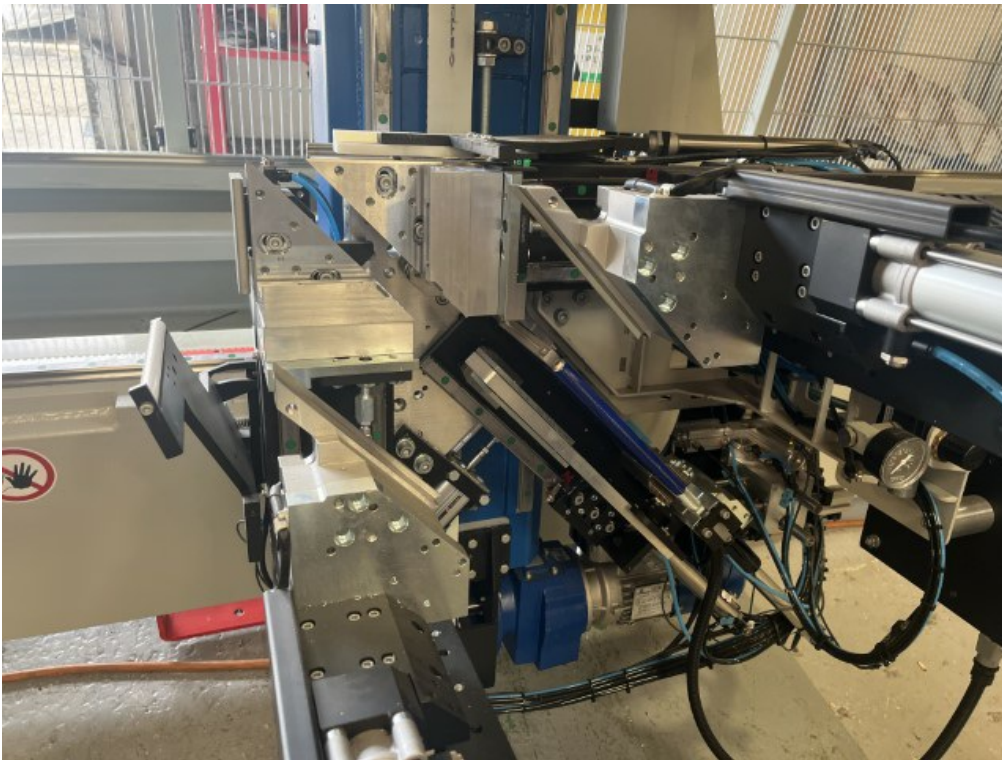


No higher resolution available.

VSM_Head.jpg (640 × 480 pixels, file size: 101 KB, MIME type: image/jpeg)

File history

Click on a date/time to view the file as it appeared at that time.

	Date/Time	Thumbnail	Dimensions	User	Comment
current	12:41, 8 September 2022		640 × 480 (101 KB)	Gareth Green (talk contribs)	

You cannot overwrite this file.

File usage

The following page links to this file:

VSM Welder After Welding Options

Metadata

This file contains additional information, probably added from the digital camera or scanner used to create or digitize it. If the file has been modified from its original state, some details may not fully reflect the modified file.

Camera manufacturer	Apple
Camera model	iPhone 13 mini
Exposure time	1/104 sec (0.0096153846153846)
F Number	f/1.6
ISO speed rating	125
Date and time of data generation	11:11, 8 September 2022
Lens focal length	5.1 mm
Latitude	52° 35′ 24.18″ N
Longitude	1° 42′ 35.08″ E

Altitude	6.687 meters above sea level
Orientation	Normal
Horizontal resolution	72 dpi
Vertical resolution	72 dpi
Software used	15.6.1
File change date and time	11:11, 8 September 2022
Y and C positioning	Centered
Exposure Program	Normal program
Exif version	2.32
Date and time of digitizing	11:11, 8 September 2022
Meaning of each component	1. Y 2. Cb 3. Cr 4. does not exist
APEX shutter speed	6.6976493633692
APEX aperture	1.3561438092556
APEX brightness	3.0759142962689
APEX exposure bias	0
Metering mode	Pattern
Flash	Flash did not fire, compulsory flash suppression
DateTimeOriginal subseconds	822
DateTimeDigitized subseconds	822
Supported Flashpix version	0,100
Color space	Uncalibrated
Sensing method	One-chip color area sensor
Scene type	A directly photographed image
Exposure mode	Auto exposure
White balance	Auto white balance
Focal length in 35 mm film	26 mm
Scene capture type	Standard
Speed unit	Kilometers per hour
Speed of GPS receiver	0.24
Reference for direction of image	True direction
Direction of image	227.77165220351
Reference for bearing of destination	True direction
Bearing of destination	227.77165220351