



Fichier:Zebra ZD421 - Photo4.png

5. Align the Spring Wire Notch on the backside of the printhead to the Spring Wire. Push the right side of the printhead into the printer until the latch locks the right side of the printhead into the printer.

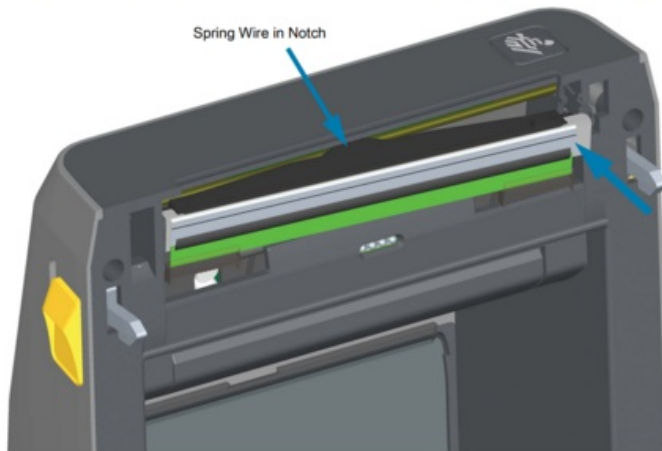

6. Verify that the printhead moves up and down freely when pressure is applied and remains locked when released.

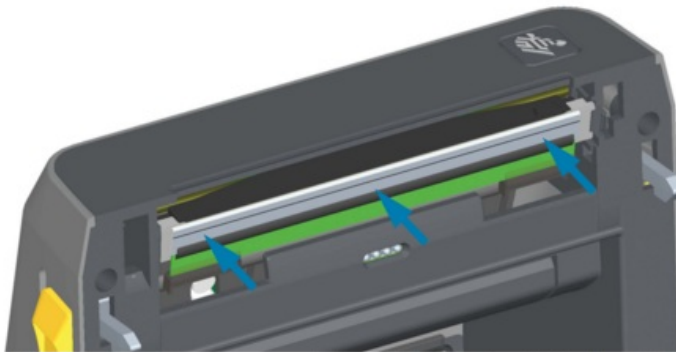


Size of this preview: 590 × 599 pixels.

Original file (1,229 × 1,248 pixels, file size: 719 KB, MIME type: image/png)

File history

Click on a date/time to view the file as it appeared at that time.

	Date/Time	Thumbnail	Dimensions	User	Comment
current	15:16, 14 September 2023		1,229 × 1,248 (719 KB)	Gareth Green (talk contribs)	

You cannot overwrite this file.

File usage

The following page links to this file:

Zebra ZD421 - Print head change